

NEW JCB 3DX SUPER | BACKHOE LOADER



Powered by

JCB ENGINE
ecomax



CEV IV
STAGE

POWERED TO SUCCEED

JCB

THE ICON THAT REVOLUTIONISED THE WORLD

In 1953, JCB introduced one of the most pioneering machine to ever enter the market. The MK I excavator had a loader mounted on the front and a hydraulic excavator fitted to the rear. It was the world's first backhoe loader; one machine that could perform a variety of jobs.

Today, 1 out of every 2 backhoes sold across the globe is a JCB.

Over the decades, the world's most iconic machine has constantly evolved to meet its customers' changing demands.



THE 50's.
REVOLUTIONARY
PRODUCTIVITY.



THE 60's.
MORE COMPACT.



THE 70's.
GREATER
VERSATILITY.



THE 80's.
MORE POWER.



THE 90's.
IMPROVED
COMFORT.



THE 00's.
GREATER
PRODUCTIVITY.



THE 10's.
INCREASED
EFFICIENCIES.



THE 20's.
EASE OF USE.



EMPOWERING
THE FOUNDATION OF
EVERY DREAM

**BHARAT
KA JCB**

BACKHOE LOADER

Our journey from being made in India to making India can be encapsulated in one phrase and i.e. Bharat Ka JCB. We truly are humbled and grateful for the trust and confidence exhibited by our customers. We take this milestone as a prelude to another historic tale that we promise to write with you by seeking better ways for symbiotic success



CELEBRATING
3,50,000+
BACKHOE LOADERS
#SafaltaKaBharosa

POWERED TO SUCCEED

Introducing the **NEW** CEV Stage IV 3DX SUPER

Powered by

JCB ENGINE
eCOMAX



CEV IV
STAGE

The surest way to overcome the toughest challenges is to believe that you can. With a JCB Backhoe Loader that is built to deliver, the challenges get easier. Dream big, you've got a JCB Backhoe that you can depend on.

#SafaltaKaBharosa



5.05 METRE
DIG DEPTH

2.9 METRE
DUMP HEIGHT

JCB EASYSHIFT

SMOOTH RIDE*

SEMI AUTOMATIC KICK DOWN

6-in-1
BUCKET

4x4 4 wheeled drive as standard with 6-in-1 Bucket

LOADED WITH INNOVATIVE FEATURES




MADE IN INDIA, MADE FOR SUCCESS.

Introducing the **NEW**
CEV Stage IV ecoMax Engine.

Efficient | Reliable | Simple



Well tested 
1,00,000+
cumulative hours

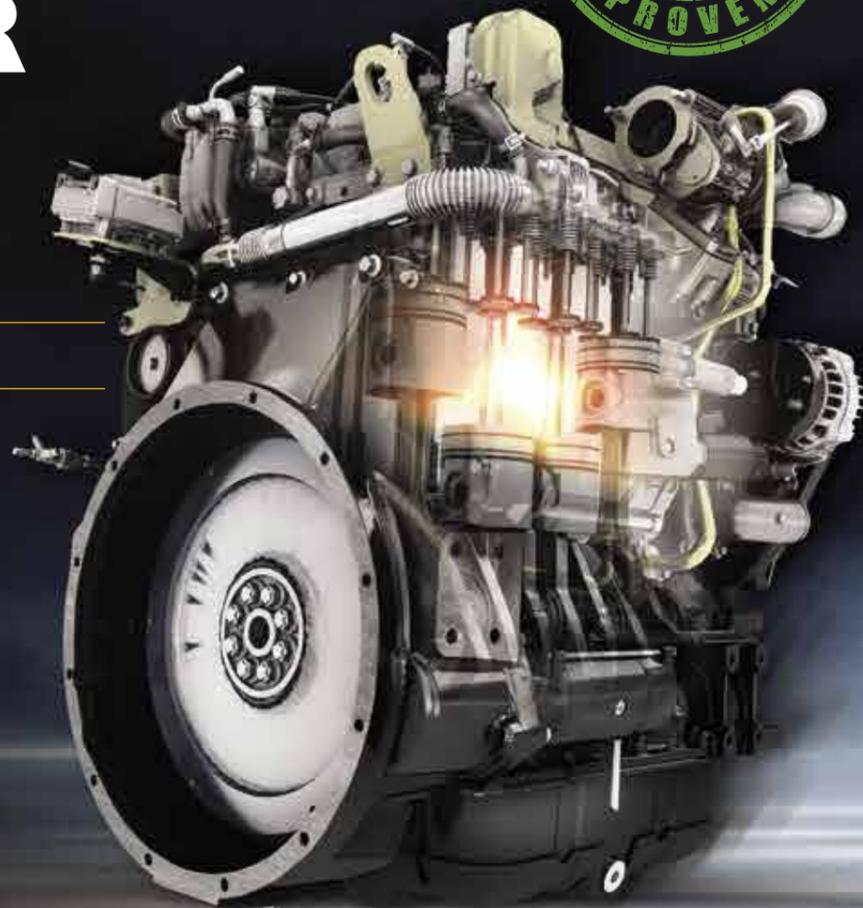

16
Valves
Effort



CRDI



POWERED WITH ENGINEERING BRILLIANCE

1 JCB ecoMAX 444 is one of the efficient & reliable engines in construction industry. The combination of CRDI technology with high pressure fuel line & swirl design in combustion chamber reduces the complicity & manages to achieve the CEV Stage IV norms value efficiently without after treatment.

2 A fuel efficient engine with CRDI Technology- low SFC, 16 valves effort and improved swirl for cleaner combustion.

3 Higher performance due to high torque at low speed. EGR with 2 stage cooling mechanism and turbocharger with Waste Gate Technology (WGT).

4 High swirl design for better combustion, no after treatment required.

5 Sturdy design of bedplate, robust fuel filtration system and IP69 connectors make the engine durable and reliable.

6 The engine is designed and tested rigorously to adapt to Indian conditions for more than 1,00,000 cumulative hours.

7 Common Rail Direct Injection (CRDI) technology saves fuel, gives more power and cleaner emission norms.

8 High performance and more power with turbocharger.

9 Highly effective sensors to continuously monitor engine health.



LOADED WITH INNOVATIVE FEATURES

JCB ecoMAX CRDI Engine
Common Rail Direct Injection (CRDI) technology saves fuel, gives more power and cleaner emission norms.

Well Tested 1,00,000+ Cumulative Hours
The engine is designed and tested rigorously to adapt to Indian conditions for more than 1,00,000 cumulative hours.

Improved Seat
The ergonomically designed seats come with new improved cushions and stitches. Now, operator can work tirelessly for longer hours.

Smooth Hand Throttle
Smooth hand throttle results in nearly zero or low effort, reducing operator fatigue.

Smooth Foot Throttle
Smooth foot throttle results in nearly zero or low effort, reducing operator fatigue.

Feedpump
No priming required, no possibility of air in fuel system making engine more durable.

Redesigned Roof
New stylised roof for better rainwater management increasing uptime in rainy seasons.

Internal Rearview Mirror
Provides assistance to operator to see rearwards.

LiveLink 4.0
Advanced LiveLink, an innovation that gives you the additional facility of data analytics about the operational behaviour of your machine.

Intelli Diagnostics
A Smart App is connected to the machine via bluetooth which enables quick identification of concerns.

Robust Hydraulic Filtration with Clog Indication
Longer hydraulic components life.

LED Rear Work Lamp*
LED rear work lamps for improved visibility at night.

Improved Bedplate Design
Sturdy construction.

Crank Case Ventilation (CCV)
Crank Case Ventilation System - reduces oil wastage, lowering maintenance cost.

Robust Fuel Filtration System 2 & 5 Micron Filter
The pre-filter of 5 micron with water separator & main filter of 2 micron filter elements are specially engineered media technology with a proper mixture of glass fiber & synthetic media.

Forged Crankshaft
Better life of crankshaft.

MODE LR Loading & Rooding Modes
Loading & Rooding modes help in saving fuel.

15%* Maintenance Cost Reduction
Save every year with 15% periodic maintenance cost reduction.

MODE EP Economy & Plus Mode
Plus mode helps in achieving additional productivity.

Digital Speedometre
Operation made easy with an advanced Digital Speedometre that displays speed with clarity.

40 kmph Maximum Speed
Less transit time with higher max. speed of 41 kmph.

Auto Idle
Save fuel as the machine goes automatically into Auto Idle mode after 10 seconds of idling period.

Digital Display
New Informative Digital Cluster Display for smooth operation.

Easy Shift
Better productivity and rested operator with effortless gear shift.

Auto Stop
The Auto Stop feature saves fuel by automatically switching off the engine after 6 minutes of waiting period.

Trip Metre (Kilometre & Hours)
Keep track of the distance covered & hours clocked.

Semi Kick Down
Semi Automatic Kick Down for effortless gear shift.

7%* Lower Noise Level
Stay fatigue-free and work for longer hours with ease.

SRS (optional)
Better Productivity, longer life of front axle and smooth travel achieved due to Smooth Ride System.



Powered by



POWERED BY SPLENDID EFFICIENCY

- 1 10%* lower fuel consumption in mix duty cycle, more saving.
- 2 The advanced CEV Stage IV JCB ecoMAX engine with CRDI technology is fuel efficient.
- 3 The two stage EGR cooler & 16 valves system allow better combustion & exhaust
- 4 Variable Displacement Pump is programmed to control the flow depending on the load to minimise the hydraulic losses.
- 5 Better productivity due to higher flow of 125lpm.
- 6 Excavation modes to optimise the fuel consumption as per jobs.
- 7 Economy mode & variable pump manage the flow based on pressure, achieving lower fuel consumption and optimum productivity.
- 8 The Auto Stop feature saves fuel by automatically switching off the engine after 6 minutes of waiting period.
- 9 Save fuel as the machine goes automatically into Auto Idle mode after 10 seconds of idling period.

1
10% MORE FUEL EFFICIENT


3
16 Valves Effort

E ECONOMY MODE



AUTO STOP

Auto idle

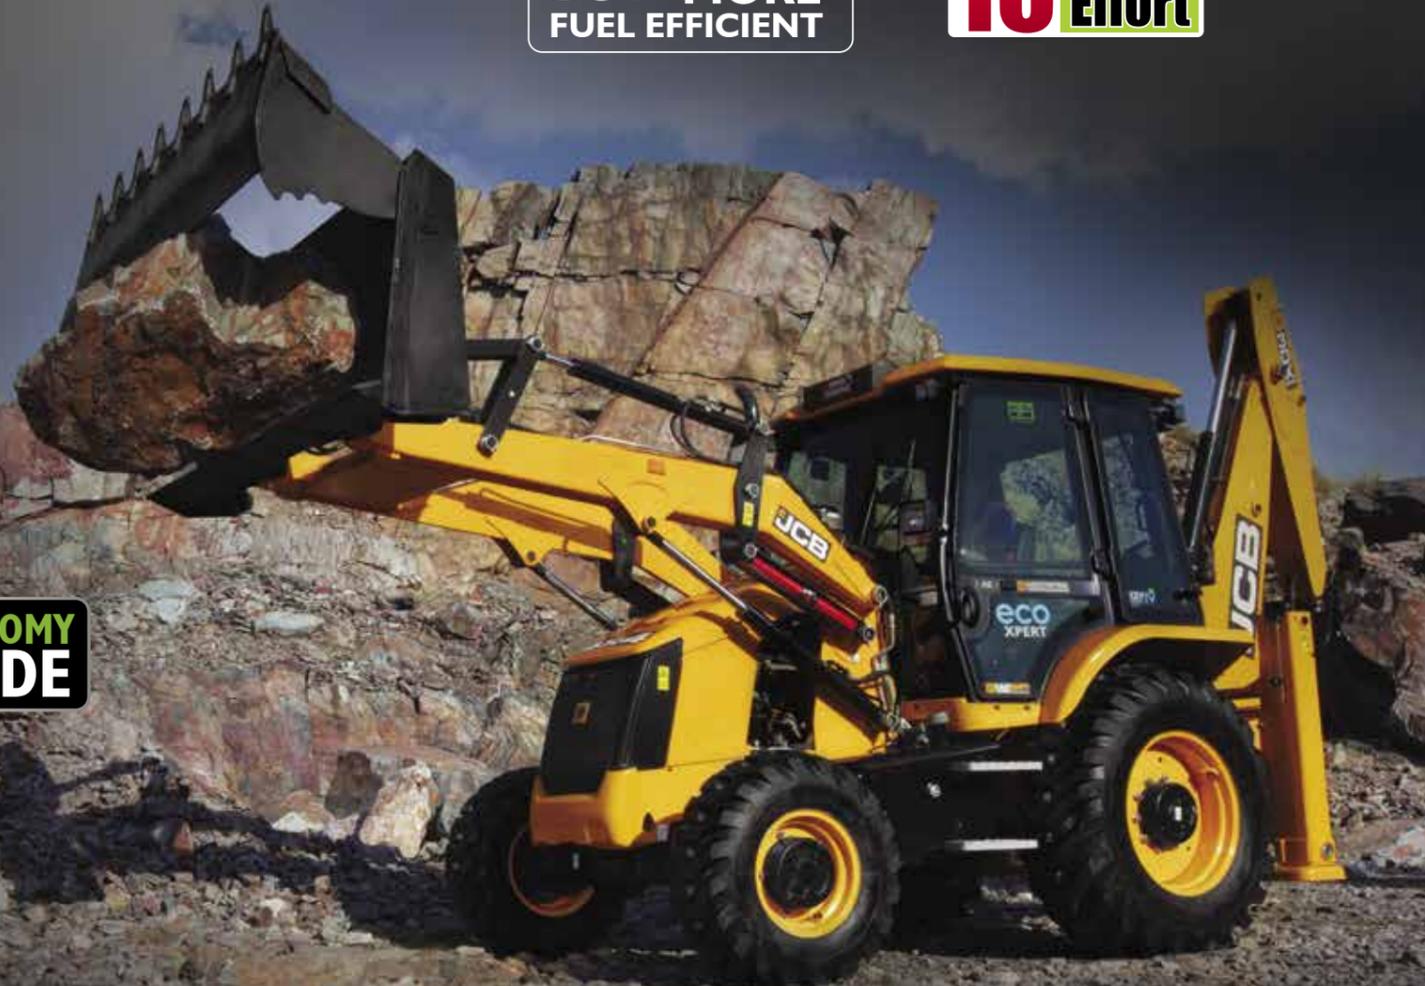

*Against the current 3DX Super ecoXcellence. The trials has been done under control environment & as per set SOP and duty cycle agreed by JCB & ICAT. T&C Apply.

POWERFUL PERFORMANCE & PRODUCTIVITY



- 1 Maximum torque-400 Nm ensures quick engine response & gives ability to work in hard applications.
- 2 Higher productivity with 0.30 cu.m excavation bucket.
- 3 Higher reach with 2.9m dump height.
- 4 Deeper digging with 5.05m dig depth which is 6%* higher than the base model.
- 5 Plus mode for productivity.
- 6 Loading & Roading modes help in saving fuel.
- 7 Loading mode for re-handling & Roading mode for travel.
- 8 Standard Mode - In plus mode if the engine operates up to 1500 rpm, the productivity will be higher than eco mode.

1
TORQUE 400 Nm

3
2.9 METRE DUMP HEIGHT

4
5.05 METRE DIG DEPTH

5
P+ PLUS MODE

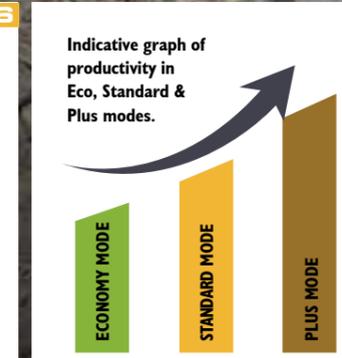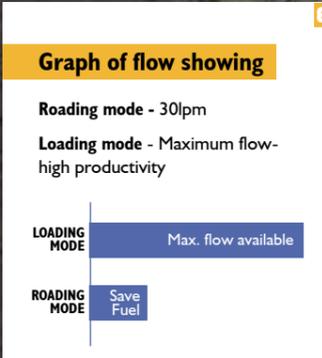

7
L LOADING MODE

R ROADING MODE

8
S STANDARD MODE



*Optional.

*T&C Apply. Against the current 3DX Super ecoXcellence, tested under controlled environment.

POWERFUL PERFORMANCE & PRODUCTIVITY

10 Easy Shift: Ease of operation and rested operator for better productivity with effortless gear shift that has rotating knob on shuttle gear level.

11 Semi Automatic Kick Down: While doing loading in 2nd gear, operator can shift to 1st gear with push of a button and automatically shift to 2nd gear as soon as reverse gear is engaged during loading cycle.

12 Less transit time with higher max. speed of 40kmph



SMOOTH RIDE*

Smooth Ride System: The Loader arm connected to accumulator observes the bumps & thus, reduces oscillation of the machine. It allows operator to drive the machine at higher speed with greater comfort.

Better productivity, longer life of front axle and smooth travel achieved due to Smooth Ride System (optional).



The pictures used and facts given are graphic representations and approximate values. The actual color and numbers may vary.

IN EVERY TERRAIN 4WD IS ENGINEERED TO PERFORM UPHILL TASK EFFICIENTLY AND EFFECTIVELY ESPECIALLY IN HILLY TERRAIN.

All Terrain Ability
Best suited for high terrain

More Fuel Efficiency

More Tractive Effort

More Bucket Filling Factor

Lesser Cycle Time



*Optional

POWERED WITH UNMATCHED VERSATILITY

Perform many jobs with one bucket, introducing the most versatile function of JCB 3DX Super, the 6 in 1 bucket, best suited for road development.



6-in-1 BUCKET

GRABBING



GRADING



SPREADING



DOZING



LOADING



DIGGING



POWERED BY RELIABILITY & DURABILITY

1 Robust engine designed and tested rigorously across India in every condition for 3 years and more than 1,00,000 cumulative hours.

2 New JCB ecoMAX engine has best fuel filtration system. The pre-filter of 5 micron with water separator & main filter of 2 micron filter elements are specially engineered media technology with a proper mixture of glass fiber & synthetic media.

3 Glass fiber is intact & won't lose fibers as compared to cellulose media.

4 Improved hydraulic filtration system.



Efficient | Reliable | Simple



Well tested 
100,000+
cumulative hours



Integrated JCB ecoMax Engine Assembly Line

NO FAULT FORWARD



POWERED BY RELIABILITY & DURABILITY

1 The boom and dipper is designed to perform heavy-duty work in arduous region.

2 Loader arm is designed in D Shape, the side plate is inside & channels are outside. It resists the twisting while entering in pile making it ideal for tough applications.

3 JCB 'Q' brakes are quick and reliable. The hydraulically actuated, dual line and self adjusting (compensated) brakes pedal reduce operating force for effective braking.

The multi-disc type brakes on rear axle are immersed in oil and require low maintenance as they are well protected from dirt, water, etc.

4 The "H" section has a bigger cross sectional area & more welding area, making it a sturdier & reliable loader arm joint section.

5 The chassis is engineered to be durable and robust making it fit for demanding situation.

6 2,000 bar high pressure fuel injection for robust fuel system to work efficiently in any harsh operating environment and maintain emission limits.

7 Durable & waterproof IP69 certified connectors.

8 Perform heavy-duty work in any terrain with less vibration and no noise due to especially engineered engine bedplate. It also makes engine durable.

9 Better stability and durability with reliable JCB rear axle fitted with heavy-duty differential / planetary gears & final drive. The axle is manufactured at JCB plant & has undergone rigorous testing.


10 The 4-speed, fully synchromesh heavy-duty transmission, dual cone type synchroniser provides smooth shift gear box with integral heavy-duty torque convertor.

11 Restrict material slippage, increase material retention and prevent bonnet from any damage with especially designed shovel.

12 More reliability and durability as the top end of the dipper is made wider with extra metal.



1 Heavy-Duty Boom and Dipper

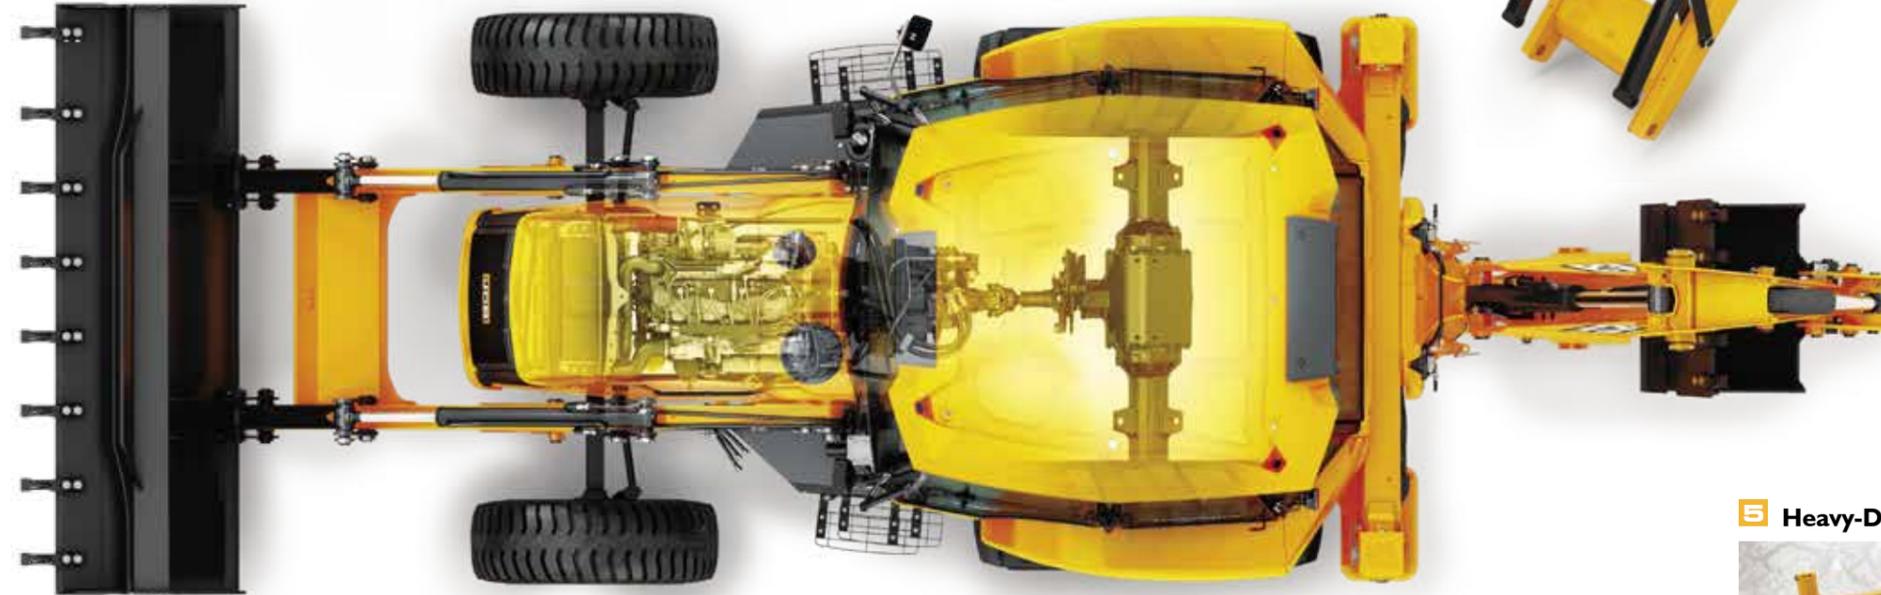

6 Engine Hi-pressure Injector



4 Heavy-Duty Loader Arm



4 H Section

5 Heavy-Duty Chassis



5




COMFORTABLE OPERATOR, MORE PRODUCTIVE SUCCESS.



1

Face fan for operator comfort in hot environment.

- 1 The new cabin has two door access with more space, liveable cabin and plenty of legroom. It is also fitted with a comfortable helper's seat.
- 2 Nearly zero effort to low effort hand throttle, lever has no wire for smooth operation. It is low on maintenance as zero adjustment is required and there is no wire for replacement.
- 3 Independent steering pump provides quick response to movement of steering wheel. The twin-cylinder gives equal turn on both sides making the operator confident and safe.
- 4 The tinted front windscreen keeps the cabin cooler & protected from sun glare.
- 5 The 6-duct air-conditioned cabin* keeps the operator productive and fatigue-free even in hot and harsh weather conditions.
- 6 The bluetooth stereo# can be connected to mobile, now pick-up any call with ease and style.
- 7 Redesigned roof is more durable with better visibility during monsoon and rainwater management, the rain water travels along the cabin pillars.
- 8 The ergonomically designed seats come with new improved cushions and stitches. Now, operator can work tirelessly for longer hours.
- 9 Ease of operation and rested operator for better productivity with effortless gear shift that has rotating knob on shuttle gear level.

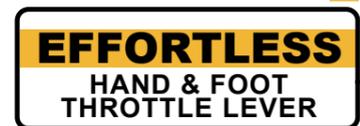

*Available as an accessory at JCB authorized dealerships.

*Optional



LED LIGHTS

New stylish LED rear work lamp* gives better visibility in excavation application. It consumes less power, therefore, comparatively lesser fuel consumption



Ergonomically placed levers that are column mounted. The electric reversing shuttle switch can change machine direction while allowing operator to keep hands on the steering wheel.



Internal rearview mirror - Improved rear visibility.
Excellent ventilation - Partial or full opening of both front and rear side windows.




Redesigned roof is more durable with better visibility during monsoon and rainwater management, the rainwater travels along the cabin pillars.



*Available as an accessory at JCB authorized dealerships.

New Informative Digital Cluster Display

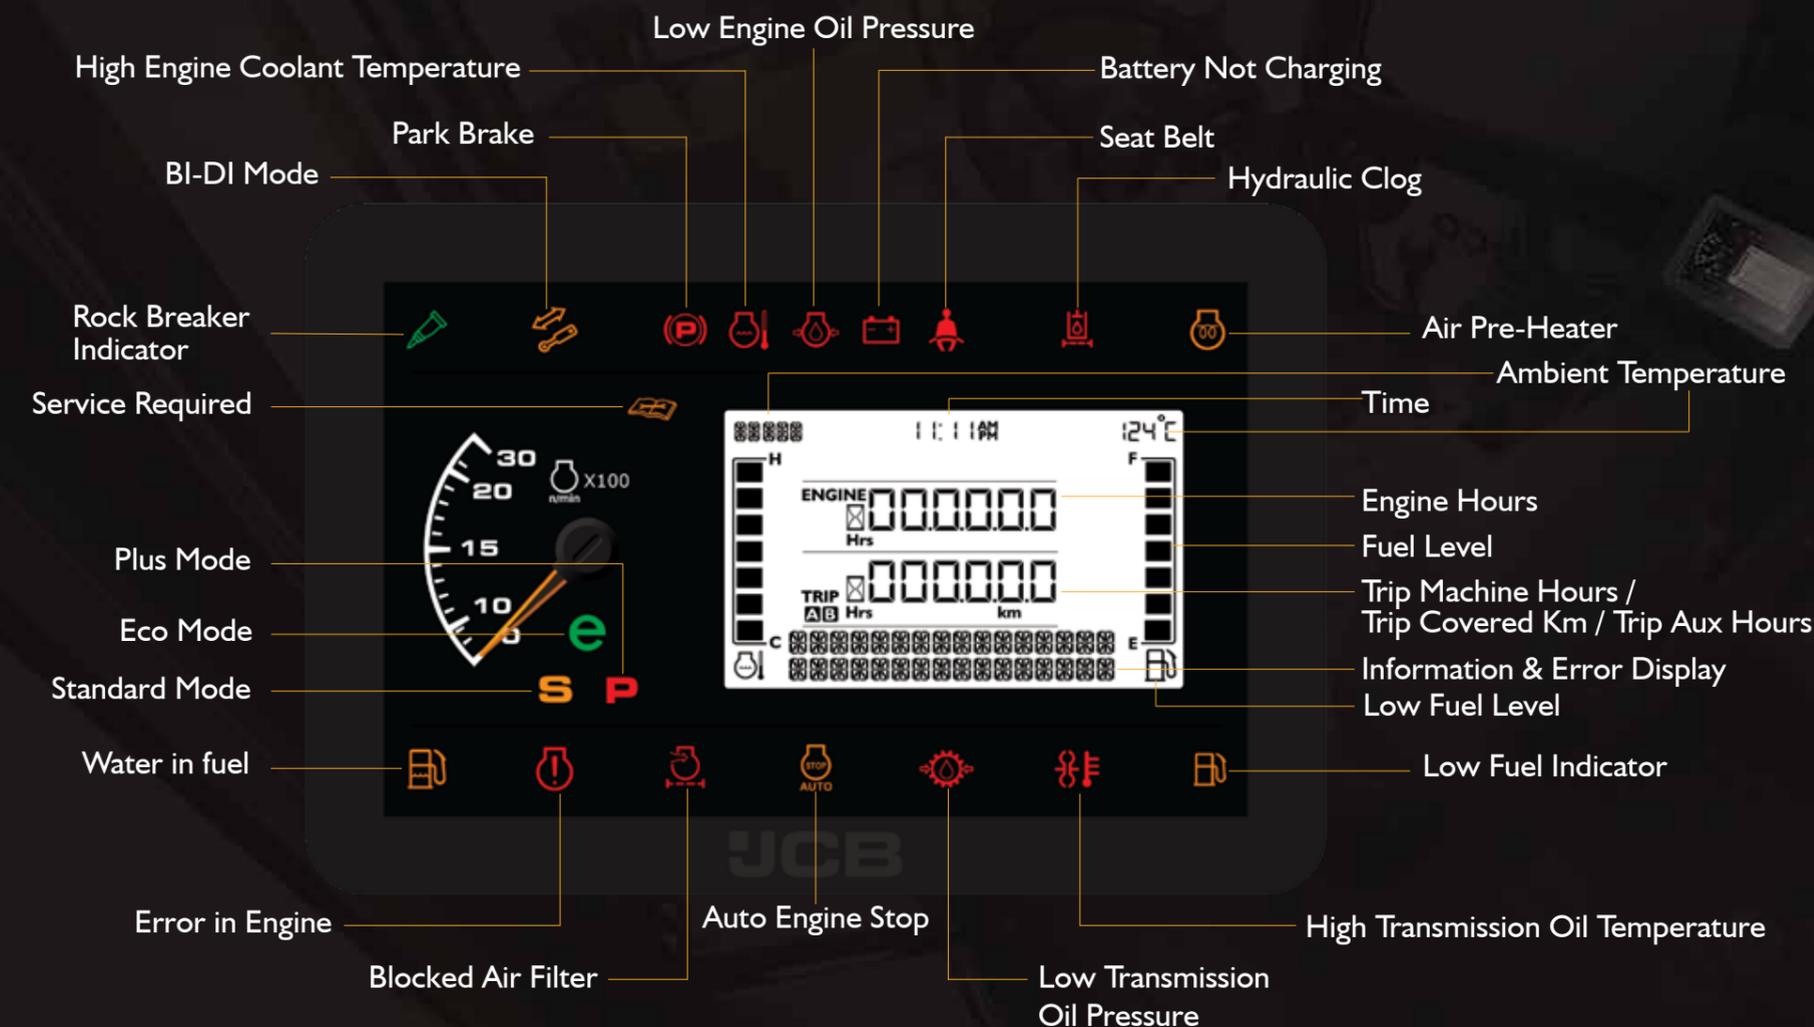

LOW ON MAINTENANCE, HIGH ON SUCCESS.

1 Save every year with 15%* periodic maintenance cost reduction.

2 JCB's innovative hydraulics system & filtration keep hydraulic oil very clean, extending its change period from 2,000 hours to 4,000* hours.

3 Digital visual warning system for any malfunction along with alerts & description, which can be specified to service engineer before his arrival on the site.

4 Improved hydraulic return filtration system.

5 Hydraulic Filter Clogging Indicator - Higher life of hydraulic components.

6 Feed Pump - No manual priming required, no chance of air intake in fuel feed pipe, making engine durable.

7 Crank Case Ventilation System - Reduce oil wastage, lowering maintenance cost.

8 Expansion Tank - Easy to check coolant level.



*T&C Apply. Against the current 3DX Super ecoXcellence, tested under controlled environment.



EXTENDED CARE

GIVE YOUR MACHINE EXTENDED WARRANTY AND CARE.

- JCB Careplus is an extended warranty programme that comes into effect after the machine's standard warranty expires.
- JCB Careplus can be purchased within the 1st year from the sale of the machine.
- The programme offers you peace of mind and saves your maintenance cost even after your machine's standard warranty expires.



Extended Warranty Programme



BENEFITS OF JCB CAREPLUS

| | | | | | |
|--|-------------------------------|--|---------------------------------|--|-----------------------|
| | No limits on number of claims | | Preventive maintenance service* | | Nationwide coverage** |
| | JCB skilled manpower support | | Maximum productivity | | Maximum uptime |
| | Maximum performance | | Breakdown cost protection | | Better resale value |

*Varies on JCB Careplus package selected.
**All services completed in line with the JCB recommended service interval schedule.

EXTENSIVE PARTS SUPPORT

JCB genuine parts offer a comprehensive machine protection solution.



JCB LOYALTY PROGRAMME



Our loyalty programme is a reflection of our brand promise and our constant endeavour to offer you more than your expectations.

Instant membership card | Welcome kit
Reward points | Extended benefits
Special programme features

INTRODUCING THE NEXT GENERATION



LiveLink is an advanced telematics technology which helps you monitor and manage your machine fleet remotely from anywhere in the world via web or your smartphone.

Power of LiveLink: With LiveLink you can reduce fuel costs, optimise machine, operator performance, proactively manage service and maintenance to maximise uptime. Stay connected to your machines via remote monitoring, experience new levels of control and efficiency with LiveLink.

SERVICE


- Service reminder:** Reminds you when the service of your machine is due; the reminder helps you plan your work better.
- Machine data backup:** Helps to maintain the records of past services in an organised manner.
- Critical machine health alerts:** Lets you know the inside of your machine from a faraway location. Helps in taking proactive measures to avoid breakdown through alerts.

OPERATION

- Fuel level information:** View fuel usage of your machine, which helps in analysing your machine's fuel consumption, thus, helping you improve efficiency and saving on fuel. It also reports any sudden fuel level decrease.
- Machine utilisation reports:** Maintains machine usage record and helps you analyse & optimise utilisation of the machine.
- Engine status:** Informs you if your JCB machine's engine is switched ON or OFF.

SECURITY

- GPS tracking:** Tells you the exact location of your machine on a map.
- Tow away alerts:** Help you save your machine from intruders and possible towaways.
- Operating hours:** Lets you control the machine operation in permitted time frame.
- Geofencing:** Lets you keep your machine within the allocated area of work.

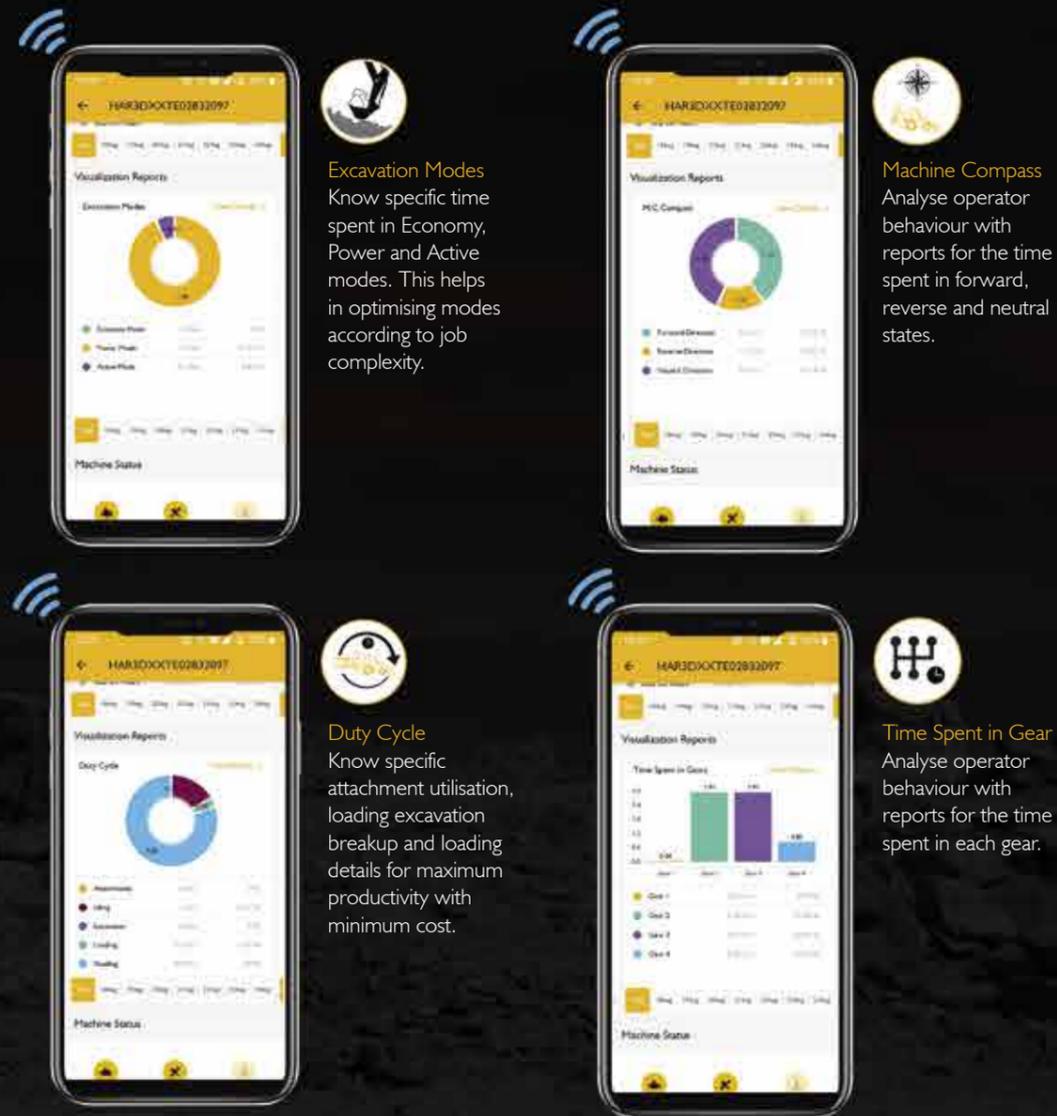

Excavation Modes
Know specific time spent in Economy, Power and Active modes. This helps in optimising modes according to job complexity.



Machine Compass
Analyse operator behaviour with reports for the time spent in forward, reverse and neutral states.




Duty Cycle
Know specific attachment utilisation, loading excavation breakup and loading details for maximum productivity with minimum cost.




Time Spent in Gear
Analyse operator behaviour with reports for the time spent in each gear.



PERFORMANCE DIMENSIONS

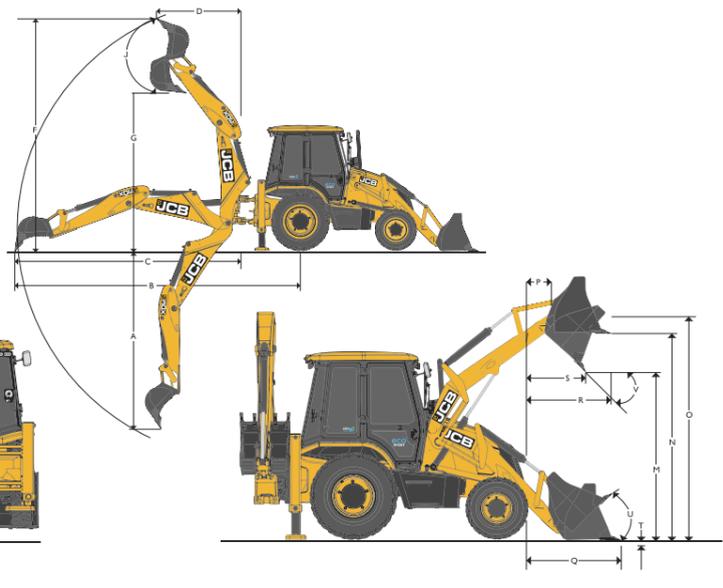

STATIC DIMENSIONS

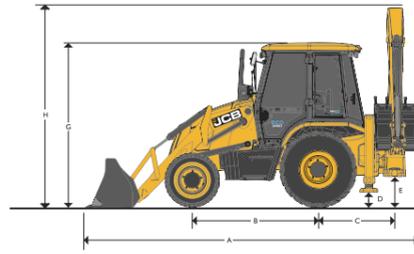


| | | |
|-----------------------------------|---|--------------|
| A Overall length | m | 6.10 (20-0) |
| B Wheelbase | m | 2.24 (7-4) |
| C Slew centre to rear axle centre | m | 1.32 (4-4) |
| D Minimum ground clearance | m | 0.31 (1-0.2) |
| E Slew ground clearance | m | 0.51 (1-8) |
| G Height to top of cab | m | 2.87 (9-5) |
| H Overall height | m | 3.90 (12-10) |
| J Track width - Rear | m | 1.73 (5-8) |
| K Track width - Front | m | 1.91 (6-3) |
| L Width over bucket | m | 2.23 (7-4) |

LOADER PERFORMANCE

| | | |
|--|------|--------------|
| M Dump height | m | 2.91(9-7) |
| N Load over height | m | 3.37 (11-1) |
| O Pin height | m | 3.64 (11-11) |
| P Pin forward reach | m | 0.41 (1-4) |
| Q Reach at ground | m | 1.58 (5-2) |
| R Max. reach at full height | m | 1.22 (4-0) |
| S Reach at full height - Bucket dumped | m | 0.90 (2-11) |
| T Below ground level dig depth | m | 0.15 (0-6) |
| U Rollback at ground | deg | 43 |
| V Dump angle | deg | 41 |
| Shovel break out force | kgf | 5,687 |
| Loader arm break-out force | kgf | 5,285 |
| Pay Load | kgf | 1,650 |
| Lift capacity at full height | kgf | 3,050 |
| Clam Shovel | cu.m | 1.0 (35.3) |

EXCAVATOR PERFORMANCE

| | | |
|--|------|--------------|
| A Max. dig depth | m | 5.05 (16-7) |
| B Reach-ground level to rear wheel centre | m | 6.93 (22-9) |
| C Reach-ground level to slew centre | m | 5.61 (18-5) |
| D Reach at full height to slew centre | m | 2.65 (8-8) |
| E Side reach to centre line of machine | m | 6.14 (20-2) |
| F Max. working height | m | 6.01 (19-9) |
| G Max. load over height | m | 4.35 (14-3) |
| H King post travel | m | 1.06 (3-6) |
| J Bucket rotation - power | deg | 185 |
| Bucket tear out force | kgf | 5,959 |
| Dipper tear out force | kgf | 3,257 |
| Lift capacity to bucket pivot at full reach (no bucket fitted) (SAE J31) (Data with standard dipper) | kg | 1,490 |
| Standard bucket capacity | cu.m | 0.30 (10.60) |
| Standard bucket width | m | 0.82 (2-8) |

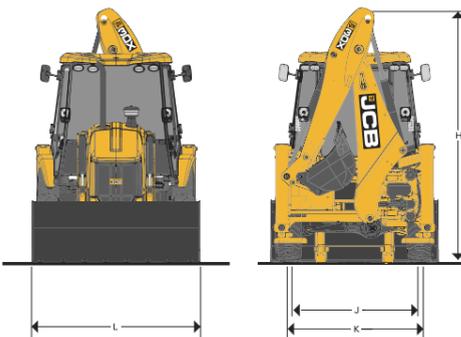

ENGINE

JCB 444,CRDI 55kW CEV Stage IV Engine, 4 cylinder, water cooled, Turbocharged with EGR Diesel Engine.
Displacement : 4.4 L
Gross power : 55kW (74hp) @ 2200 rpm
Max torque : 400Nm @ 1200 rpm

TRANSMISSION

Easy Shift JCB synchroshuttle transmission provides effortless gear shifting with column mounted rotating switch. It consists of a 4-speed, fully synchromesh, smooth shift gear box with integral torque convertor.

- Easy-to-use, column mounted electric reversing shuttle switch can change machine direction while allowing operator to keep hands on the steering wheel, leading to fast cycle time.
- JCB easy shift easy to use column mounted rotating knob type gear shifting, adds to the overall ease of operation. On-the-move gear changes are possible
- Bigger and effortless foot throttle pedal.
- Torque converter stall ratio is 3.01:1.
- Electrical selection of 4WD allows on-the-move changes.

AXLES

- **Rear** : Drive axle rigidly mounted, incorporates JCB Max-Trac torque proportioning differential, driven by short propshaft from gear box.
- **Front** : 4WD steer axle, centrally pivoted, with oscillation angle of 16°.

BRAKES

- **Service** : JCB 'Q' brakes, hydraulically actuated, dual line, self adjusting (compensated), oil immersed, multi-disc type on the rear axle, well protected from dirt, water etc. requiring no maintenance. Operated through independent pedals linked together for normal use.
- Two independently operatable foot pedals enable machine to maneuver in tight spaces.
- Option exists on the machine to automatically switch from 2WD to 4WD for effective transmission braking.
- **Parking** : Hand operated, disc brakes on rear axle input disc.

STEERING

- Power track steering rod system provides equal turn steering & quick response with less operating force.
- Working pressure 2320 p.s.i. (160 bar)
 - Hydraulic supply from independent steering pump passing through suction strainer & return line filter.

ELECTRICALS


130 Ampere-hour 12 volts battery system with alternator and full road lighting.

TYRES

Front : 12.5 x 18 - 12 PR
 Rear : 16.9 x 28 - 12 PR (Industrial)

TURNING CIRCLE

| | | |
|--------------------------------|---|--------------|
| Inner wheels braked | | |
| A* Outside loader bucket | m | 10.4 (34-14) |
| B Outside wheels | m | 7.21 (23-78) |
| Inner wheels not braked | | |
| A* Outside loader bucket | m | 11.5 (37-87) |
| B Outside wheels | m | 8.32 (27-35) |



* Standard bucket in travel position

SPEED

| Gear | Forward km/hr | Reverse km/hr |
|------|---------------|-----------------|
| 1st | 5.7 | 5.7 |
| 2nd | 9.2 | 9.2 |
| 3rd | 19.8 | Not recommended |
| 4th | 40.0 | Not recommended |

(Standard tyres, with zero torque converter slip@ 2200 rpm)

HYDRAULICS

3915 p.s.i. (270 Bar) system ; Pump flow : 125 lpm at 2200 rpm.
 Filtration through suction strainer and return line 'JCB Filtromatic Filter'.

* All dimensions, weights and timings are variable within 1.5%, JCB reserves the right to change specifications without prior notice.

SHIPPING WEIGHT

8010 kg

SERVICE

| | System |
|------------------|--------|
| Hydraulic system | 92 L |
| Fuel tank | 128 L |
| Engine coolant | 20.5 L |
| Engine oil | 15 L |
| Transmission | 17.5 L |
| Rear axle | 20 L |
| Front Axle | 11 L |

CABIN

- Tinted cab glasses provide excellent all round visibility & sun protection.
- Sunscreen on wind screen enables operator to focus while working at full height e.g. truck loading.
- Guide me home & SOS Switch for operator safety & ease.
- **Option** of servo operated excavator controls for hassle free operations.
- **Option** of air conditioning in cabin for rested operator in hot weather conditions.
- Auto idle and auto shut-off for fuel saving.
- A fully adjustable suspension seat combined with ergonomically positioned controls and soft touch steering wheel & standard fit Bluetooth enabled music system.
- Cab provides easy 'walk through' two door access. Other features include seat belt, large convex rearview mirror inside cabin, interior light, front screen wiper, cabin fan, front and rear horn, hazard warning system and tool box.
- Instrumentation panel is positioned on the right hand side and includes engine speed, engine hours, fuel level, water temperature and mobile charger, service reminders, date, time, ambient temperature, trip meter (hours & kilometers) and error codes display for machine diagnostics. Easily visible while operating at both ends.
- Audio and visual fault warning system for alternator charge, coolant temperature, engine oil pressure, blocked air filter, transmission oil pressure and temperature and hand-brake on.
- LED work lamp* on excavator end for better night time visibility and safety.
- New stylish roof with improved rainwater management system.

LIVELINK

Advanced telematics technology that enables to monitor and manage machines remotely by providing information:
Service : Routine maintenance information and alerts
Operation : Health alerts & usage data
Security : Machine location & movement data

OPTIONS

- General purpose shovel (1.1 cu.m)
- Excavator buckets capacities: 0.06 cu.m, 0.09 cu.m, 0.12 cu.m, 0.18 cu.m, 0.26 cu.m
- Ditch cleaning bucket
- Taper ditch bucket
- Square hole bucket
- Rock breaker
- Ripper tooth
- Smooth ride system (SRS)
- Heavy duty rear tyres 14x25
- Auger
- Intelli-dig

Dealer's Stamp:

* Available as an accessory at JCB authorized dealerships.

SUCCESS WITH PROMPT SERVICE

4000+ CEV STAGE IV SERVICE ENGINEERS



EXTENSIVE CUSTOMER SUPPORT NETWORK

With 700+ outlets, JCB has widely spread and prompt support system in the construction industry.

One Shop Solution - JCB manufactures all major parts of its machine which are readily available at its dealerships & outlets ensuring rapid customer service support.

4,000+ service engineers are trained & certified for CEV Stage IV machines, thereby, quickly resolving any customer concern.


| | |
|--|-------------------------------------|
| 60+ Dealers | 700+ Outlets |
| 3000+ Mobile service engineers | 18 Operator training centres |
| 5 Parts warehouses | 24x7 Support 12 Languages |
| 250+ Service vans | |



SMART & DIGITAL SUPPORT



Download from:

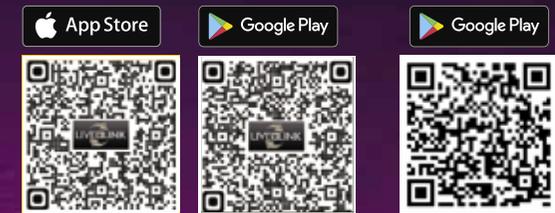

LiveLink

Genuine Parts

Dealer's stamp:

JCB INDIA LIMITED (Registered office)

B-1/1-1, 2nd Floor, Mohan Co - operative Industrial Estate,
Mathura Road, New Delhi - 110 044

For more information SMS "JCB" to **56767** or call our toll free no. **1800-1037-386**

Website: www.jcb.com | Follow us: /JCBIndiaLtd

©2009 JCB Sales. All rights reserved. No part of this publication may be reproduced, stored in a retrieval system, or transmitted in any form or by any other means, electronic, mechanical, photocopying or otherwise, without prior permission from JCB Sales. All references in this publication to operating weights, sizes, capacities and other performance measurements are provided for guidance only and may vary dependant upon the exact specification and usage of machine. They should not therefore be relied upon in relation to suitability for a particular application. Guidance and advice should always be sought from your JCB Dealer. JCB reserves the right to change specifications without notice. Illustrations and specifications shown may include optional equipment and accessories. The JCB logo is a registered trademark of J C Bamford Excavators Ltd.

